

May 2000

: LTD. SERVICE

AIRS & ANELS!



MAP 295

collegiay and all the fluid made the 195 twice GPS. Comes it remain artemas, lighter adopter. PC also and carrying

> \$1449 \$999 \$599 \$499

\$499.99 \$629.00 \$169.90

WN KIT

- twent be hu

\$27.95

preserves night set of AA batter a shock & vibra-

ne) Instrand a operations to drivers at matien for NVG

> \$49.95 \$69.95 \$69.95

OMETER

+ 24 hour clock, with time-out or I date. Available tery or 12 V-28 V

> \$114.00 \$114.00


IAL EPIRB

RB available. It 121.5 (civilian) and rescue frephly flexible fixed in and ready for rms signal transtruseful (ife), inimum, 5-year

## ¢225.00

# FILL GERS TRAINING & CAREERS

The Evolution of Instrument Flying and ATC System

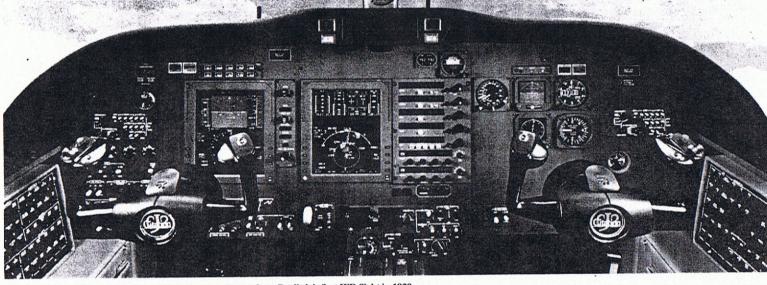

Cessna's CJ2 panel: The speed of the state of the art- a far cry from Doolittle's first IFR flight in 1929.

### By Harry Kraemer

It was May 1918 and President Woodrow Wilson was on hand to witness the first take-off of a U.S. Air Mail plane. The airmail pilots were some of the earliest pioneers of instrument flying. They started an evolution that would continue through to the present with our current day automated/glass cocknits.

Lighted beacons defined the first airways. The early beacons were equipped with a valve on the side that automatically turned the beacon on when the sun set or there was dense fog. As long as the sun would shine, the beacon would stay off. In clear weather, the beacons could be seen for 70 miles or more. By 1926, there were approximately 500 beacon lights along 2,665 miles of airway. By 1946, the number of beacons increased to 2,112 along 124 air routes.

The beacons would flash the Morse Code for the letters W, U, V, H, R, K, D, B, G and M, in that order. The airway would start with "W" and the sequence would start again with the alexanth and truenty-first beacon, etc.

For landing at night or in bad weather, a half-billion candlepower floodlights were used. The early planes were equipped with two flares, each on a parachute. When a pilot had to make a forced landing or a landing in bad weather, he would pull a lever in the cockpit and release one of the flares. As the flare would drop and clear the plane, the parachute would open and the flare would ignite to illuminate the ground below the aircraft for landing.

In 1926, a philanthropist named Daniel Guggenheim created a fund for "The Promotion of Aeronautics." About \$2,500,000 was set aside for this intensive research program, which had two objectives: the dissipation of fog and solving the problem of flying in the clouds or fog. (The tests on the dissipation of fog were found to be unsuccessful and were later stopped.) The Guggenheims saw aviation's potential and the need for technical advancement. They also set up aeronautical engineering schools at universities and painted the names of towns on rooftops to aid pilots in navigation.

In August 1928, Lt. James H. Doolittle

ments of the day, and he came to the conclusion that they were not reliable or accurate enough for controlling the airplane in the clouds. He first examined two German instruments (the Anschutz and the Gyrorector) and found both to be unsatisfactory. He then sketched out an instrument that combined heading and attitude information and showed this to Elmer Sperry of the Sperry Gyroscope Co. (Sperry had invented the turn-and-bank indicator as early as 1917.) Sperry thought it would be better to make two separate instruments and developed the Sperry Horizon and Directional Gyro. Later in his test, Doolittle also determined that the current altimeter was not accurate enough. The current altimeter could only measure to the nearest 50 feet, and Doolittle wanted one that could measure to the nearest 10 feet or better, He asked Paul Kollsman of the Kollsman Company for help, which resulted in the development of the Kollsman Precision Altimeter.

Laboratory" located at Mitchell Field, N.Y.

Doolittle flew several flights using instru-

Doolittle was using two planes for the experiments, one for instrument landings and one for cross-country flying. The

Consolidated NY-2 was selected for the instrument landings because of its rugged construction. Doolittle's NY-2 had beefed-up landing gear to handle the anticipated hard instrument landings. The Vought Corsair O2U-1 was selected as the cross-country plane.

Equipped with Sperry's new instruments, Doolittle made hundreds of simulated blind landings in the Consolidated NY-2. He soon perfected blind landings. Next, to solve the problem of precision navigation, he turned to several radio experts of the day, including The Bureau of Standards, Pioneer Instrument Co., Taylor Instrument Co., the Bell Telephone Laboratories, and the Radio Corp. of America. It was decided that a homing beacon and a fan-marker would be used to guide the aircraft to the runway for a blind landing. The now famous date of the first instrument takeoff, flight and landing was September 24, 1929. Doolittle was completely enclosed in the cockpit the entire flight.

In late 1929, Walter Folger Brown, an Ohio lawyer and politician, stepped into the picture. Though Brown had no previous avia-

Continued On Page 82

# Instrument Flying

Continued From Page 77

tion experience, he became a dominant figure in shaping the course of commercial air transport and instrument flying. By 1930, Brown was a postmaster general and saw the need to equip planes with better navigation equipment. In early 1930, Brown lobbied in Congress for changes in the airlines. By April 1930, we had new regulations that provided bonuses to the airlines for using multi-engine aircraft equipped with better navigation equipment. By the mid-1930s, we had very much improved our navigation aids.

It was during the early 1930s that an engineer named Hugo Leuteritz, employed by the Radio Corp. of America, was working on his own developing radio navigation equipment essential for long-distance over-water flights. Leuteritz soon developed land-based, direction-finding equipment that could do the job. His system had a range of about 600 miles. During the summer of 1935, Leuteritz developed a similar system with a range of 2,400 miles.

During 1933, Wiley Post decided to fly around the world solo. To assist Post on his trip, the Sperry Gyroscope Company installed the first autopilot prototype in his plane, the Winnie Mae. The Army had a new radio that homed in on commercial broadcast (automatic direction finder) and decided to let Post try it on his trip.

In 1928, the National Bureau of Standards had started research on a precision instrument landing system, though the work was discontinued in 1933. It was then taken over by the Washington Institute of Technology, and the same group of scientists who pioneered the

research at the bureau continued their work

By the late 1930s, Pennsylvania Central Airlines was using this new system called Air-Track and advertised that it had made the first instrument landing on a scheduled airline. This system was very much like our current day ILS. It was during World War II that the transponder was invented and originally was used to identify enemy aircraft. The first transponders only had 64 codes and didn't report altitude.


Eisenhower made a number of improvements in our aviation system during his presidency. Aviation was experiencing a rapid expansion during the 1950s. Conflicts between the military and civil aviation (whether to use DME or TCAN as a standard short-range navigation system) had just about stopped all efforts to develop a common ATC system. During 1956, the first en route radars were coming into the picture. By 1959, the first Air Route Traffic Control Center was commissioned, and in January 1960, the PIREP system was instituted.

It is hard to believe that it has been only 70 years since Doolittle's famous flight. We now are flying glass cockpits with auto-land systems. However, even with all our technology and automation, our landing minimums today are still higher than Doolittle's, which shows just how great his accomplishment was in 1929.

Harry Kraemer is a 6,000-hour ATPrated corporate pilot. He is a Gold Seal CFII and MEI and a NAFI Master CFI. He lives in Germantown Md.

# FACTORY NEW CESSNAS

172's, 182's, & 206's





BRAND NEW
Cessna T206
IN STOCK for
immediate
delivery
WILL ALLOW
TOP DOLLAR
FOR TRADE IN!





2000 172SP MILLENIUM. In stock for immediate delivery

# Vista Aviation INC.

AUTHORIZED CESSNA SALES & SERVICE

(800) 828-6756

Whiteman Airport (WHP) 12653 Osborne St., Pacoima, CA 91331

VISIT OUR WEB SITE - www.VistaAviation.com

# VICE STAR

# RACE PROVEN MODS

WINS "Sun 60" Piper PA28 150/160 class 6yrs straight



### Sun 60 Race results:

| 92-1st pl. 149.0mph avg   | 150hp |
|---------------------------|-------|
| 93-1st pl. 160.86mph      | 150hp |
| 94-1st pl. 173mph         | 150hp |
| 95-1st pl. 153.54mph avg  | 150hp |
| '96-1st pl. 153.64mph avg | 160hp |
| 90-18t pl. 155.54mph = 5  | 460hn |

# **VORTEX GENERATORS**

Available for all 150/160hp PA28s Lower stall while increasing cruise and better handling

## PROPELLER TIP MOD

Available for all 150/160hp PA28s Increases efficiency and reduces noise

### UNRESTRICTED STC

To increase the 150hp O-320-E2A wide deck to 160hp.

This upgrade is by far the easiest and cheapest way to add 10hp ( requires only a top overhaul )

# 160hp INSTALL STC

Unrestricted stc for the upgraded 0-320-E2A or 160hp 0-320-D2A

# SHEEPSKIN SEATCOVERS

GENUINE TOP GRADE AUSTRALIAN SHEEPSKIN - TAILORED TO FIT THE SEATS IN YOUR AIRCRAFT

- · Dense 1" Fleece
- Cool in Summer
  - Warm in Winter
- Fully Lined
- 5 Year Warranty
- Document Compliance with FAA Fire Standards
- TWO WEEK FREE TRIAL



air

\$1 P

Certi

Job Pi Guar

Thesi cours

> Cess Cess Piper

Piper Beech